

Wall-mounted air conditioners  
AIR HEAT PUMP

NOVELTY!



CARBON


GRAY

HOME series

The most advanced air conditioner functions, heating at temperatures down to -25°C, all placed in a modern, carbon fiber-style housing that suits many types of interiors, which allows it to be easily matched to the room's decoration.



Device features:

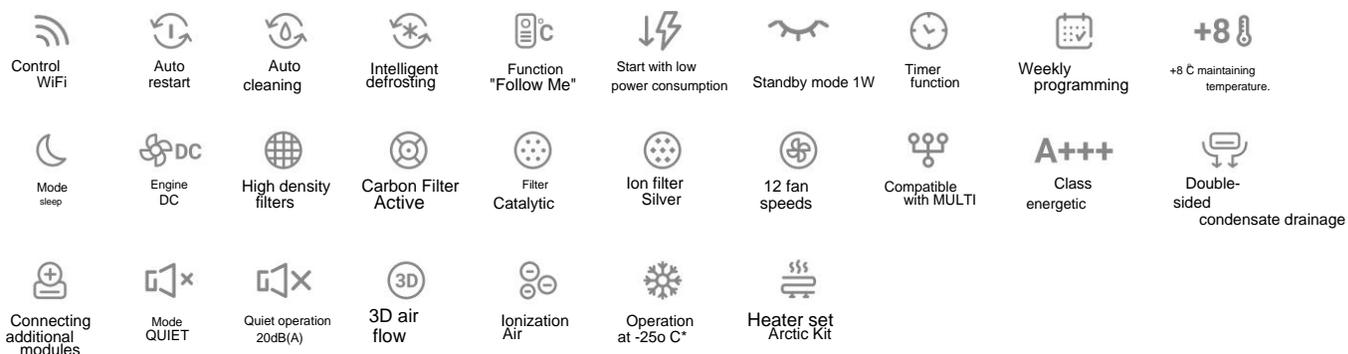

## Technical data:

Set model	internal unit	HRP-M09CGI	HRP-M12CGI	HRP-M18CGI	HRP-M24CGI
	external unit	HRP-M09CGO	HRP-M12CGO	HRP-M18CGO	HRP-M24CGO
(kW) Nominal capacity		2.6	3.6	5.3	7.3
(W) Performance (range)	Cooling	2637 (1025-3223)	3516 (1377-4308)	5275 (1934-6271)	7033 (3018-8792)
	Warming	2930 (820-3370)	3809 (1066-4381)	5568 (1289-7004)	7326 (1523-9466)
(W) Power consumption (range)	Cooling	628 (80-1100)	1005 (130-1650)	1550 (150-2250)	2420 (340-3450)
	Warming	651 (70-990)	977 (160-1560)	1630 (220-2350)	2130 (300-3150)
(A) Current consumption	Cooling	2.73 (0.4-4.8)	4.37 (0.6-7.2)	6.7 (0.7-9.8)	10.5 (1.4-15)
	Warming	2.83 (0.3-4.3)	4.24 (0.7-6.8)	7.1 (0.9-10.2)	9.3 (1.3-13.7)
(°C) Operating temperature range.	Cooling	-15-50	-15-50	-15-50	-15-50
	Warming	-25-30	-25-30	-25-30	-25-30
SEER/Energy Rating	Cooling	8.8/A+++	8.5/A+++	7.0/A++	6.5A++
SCOP/Energy class	Warming	4.6/A++	4.6/A++	4.0/A+	4.0/A+
Unit inside	(m <sup>3</sup> /h) Air flow (H/M/L) (mm) Dimensions (L*W*D) (kg) Net weight	510/360/300 835x295x208	520/370/310 835x295x208	800/600/500 969x320x241	1090/770/610 1083x336x244
	(dB (A)) Sound pressure level (H/M/L/Q)	8.7 37/31/22/19	8.7 39/33/22/21	11.2 41/37/31/20	13.6 46/37/34.5/21
	(mm) Dimensions (L*H*D)	765x555x303	765x555x303	805x554x330	890x673x342
	(kg) Net weight	26.4	26.4	33.5	43.9
Unit outside	(dB (A)) Max. sound pressure level (dB (A)) Sound pressure level in night mode Medium type	54 44	54.5 44	57 45	60 52
		R32/620	R32/620	R32/1100	R32/1450
Connection	(inch) Liquid/gas pipe diameters (m)	1/4"- 3/8"	1/4"- 3/8"	1/4"- 1/2"	3/8"- 5/8"
Installation	Maximum installation length/elevation	25/10	25/10	30/20	50/25
Connection Electric	(V//Hz) Voltage/number of phases/frequency	220-240/1/50	220-240/1/50	220-240/1/50	220-240/1/50
	(mm <sup>2</sup> ) Power cable to outdoor unit (number of lines x cross-section)	3x1.5	3x1.5	3x1.5	3x2.5
	(mm <sup>2</sup> ) Connection between units (number of lines x cross-section)	5x1.5	5x1.5	5x1.5	5x2.5

## Accessories:

Standard	Optional
	
<p>REMOTE</p> <p>WiFi module</p>	<p>Controller wall</p>

Air conditioning equipment contains fluorinated greenhouse gases R32.  
 Due to continuous product improvement, specifications may change without notice.  
 Device photos are used for illustrative purposes only, the actual appearance may differ from the presented one.  
 Net prices in PLN included in the offer are catalog prices.