


Wall-mounted air conditioners



REVOLUTION

HOME series

The basic model of the air conditioner, advanced functions and the white color of the unit create a fully universal panel that will fit perfectly into any room, ensuring the highest level of comfort of use.

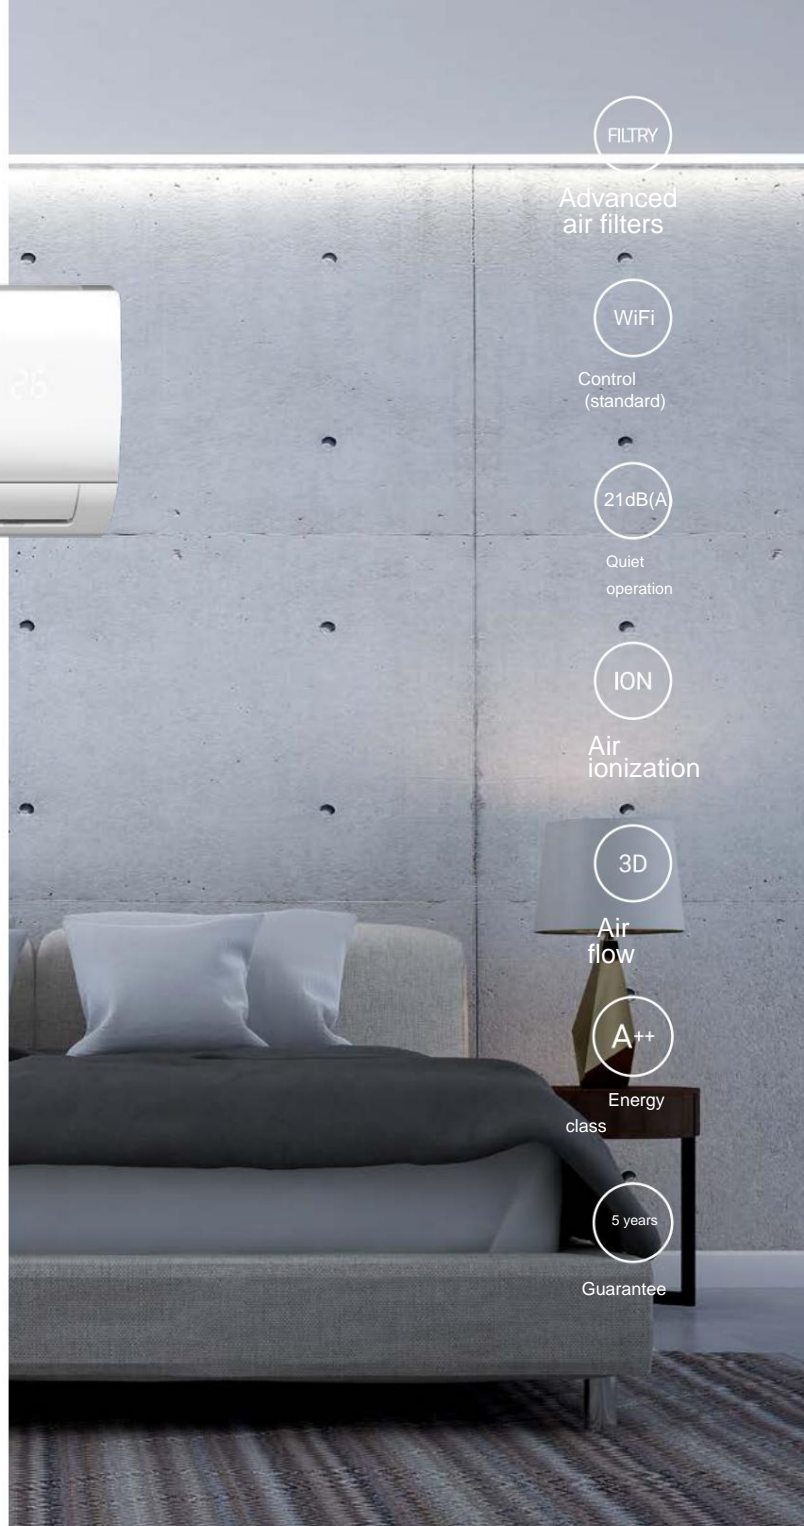

FILTRy

Advanced air filters

WiFi

Control (standard)

21dB(A)

Quiet operation

ION

Air ionization

3D

Air flow

A++

Energy class

5 years

Guarantee

Device features:

- | | | | | | | | | | |
|--------------|-------------------------|--------------------------|---------------------------|----------------------|----------------------------------|-----------------|-----------------------|--------------------|----------------------------------|
| Control WiFi | Auto restart | Auto cleaning | Intelligent defrosting | Function "Follow Me" | Start with low power consumption | Standby mode 1W | Timer function | Weekly programming | +8°C maintaining temperature. |
| Mode sleep | Engine DC | Automatic up/down blinds | Filters about Big Density | Filter Catalytic | Ion filter Silver | 12 fan speeds | Compatible with MULTI | Energy class | Double-sided condensate drainage |
| Mode QUIET | Quiet operation 21dB(A) | Ionization Air | 3D air flow | | | | | | |

Technical data:

Set model	internal unit external unit	HRP-M09RI HRP-M09RO-2	HRP-M12RI HRP-M12RO-2	HRP-M18RI HRP-M18RO-2	HRP-M24RI HRP-M24RO-2
(kW) Nominal capacity		2.6	3.6	5.3	7.0
(W) Performance (range)	Cooling	2600 (910-3400)	3600 (1110-4160)	5300 (1820-6130)	7000 (2080-7950)
	Warming	2900 (820-3370)	3800 (1080-4220)	5570 (1380-6740)	7300 (1600-8800)
(W) Power consumption (range)	Cooling	732 (100-1240)	1213 (130-1580)	1539 (140-2360)	2345 (160-2960)
	Warming	733 (120-1200)	1088 (100-1680)	1480 (200-2410)	2035 (260-3140)
(A) Current consumption	Cooling	3.18 (0.4-5.4)	5.27 (0.5-6.9)	6.9 (0.6-10.3)	10.2 (0.7-13.3)
	Warming	3.18 (0.5-5.2)	4.73 (0.4-6.9)	6.4 (0.9-10.5)	10.2 (1.1-13.3)
°C) Operating temperature range.	Cooling	-15-50	-15-50	-15-50	-15-50
	Warming	-15-30	-15-30	-15-30	-15-30
SEER/Energy Rating	Cooling	6.3/A++	6.1/A++	7.1/A++	6.1/A++
SCOP/Energy class	Warming	4.0/A+	4.0/A+	4.0/A+	4.0/A+
Unit inside	(m ³ /h) Air flow (H/M/L) (mm) Dimensions (L*W*D) (kg) Net weight	466/360/325 805x285x194	540/430/314 805x285x194	840/680/540 957x302x213	980/817/662 1040x327x220
	(dB (A)) Sound pressure level (SH/H/M/Q)	7.6 38.5/32/25/21	7.6 40.5/34.5/25/22	10.0 44/37/30/25	12.3 44.5/42/34.5/28
	(mm) Dimensions (L*H*D) (kg) Net weight	720x495x270 23.2	720x495x270 23.2	800x554x333 34	845x702x363 51.5
	(dB (A)) Max. sound pressure level Type of medium	55 R32/550	56 R32/550	56 R32/1000	59.5 R32/1600
Connection Installation	(inch) Liquid/gas pipe diameters (m) Maximum installation length/elevation	1/4"- 3/8" 25/10	1/4"- 3/8" 25/10	1/4"- 1/2" 30/20	3/8"- 5/8" 50/25
Connection Electric	(V/f/Hz) Voltage/number of phases/frequency	220-240/1/50	220-240/1/50	220-240/1/50	220-240/1/50
	(mm ²) Power cable to outdoor unit (number of lines x cross-section)	3x1.5	3x1.5	3x1.5	3x2.5
	(mm ²) Connection between units (number of lines x cross-section)	5x1.5	5x1.5	5x1.5	5x1.5

Accessories:

Standard	Optional
 	
<p>REMOTE</p> <p>WiFi module</p>	<p>Wall controller</p>

Air conditioning equipment contains fluorinated greenhouse gases R32.

Due to continuous product improvement, specifications may change without notice.

Device photos are used for illustrative purposes only, the actual appearance may differ from the presented one.

Net prices in PLN included in the offer are catalog prices.