




SOLAR TANKS

SOLITANK

- Hygienic water with stainless steel heat exchanger
- Less Lime-scale due to flexible heat exchanger
- No sacrificial anode bar
- Pressurized potable water
- Unpressurized tank
- Lightweight, aesthetic, long life and maintenance-free
- Compatible with heat pump and hybrid energy system
- Optional immersion heater
- Minimum heat loss - polyurethane insulation
- Easy installation due to compact design
- Compatible to solar energy systems
- 5 year warranty

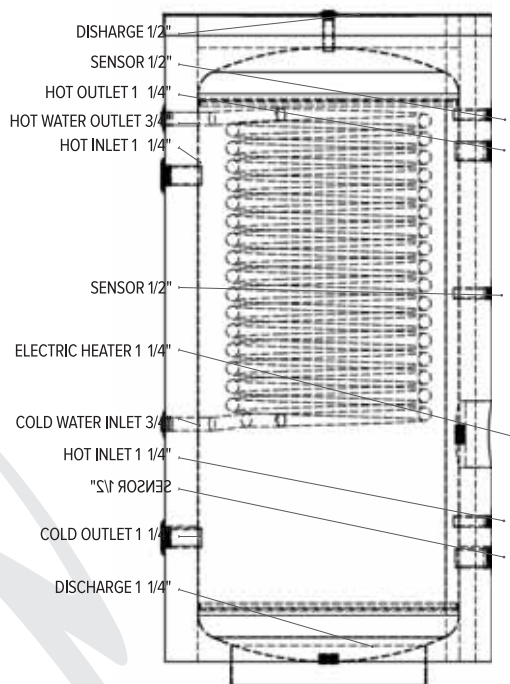

TECHNICAL SPECIFICATIONS

	SOLITANK 200	SOLITANK 300	SOLITANK 500	SOLITANK 1000
Product Code	MA-0001	MA-0002	MA- 0492	Ma- 0493
Height (mm)	1245	1770	1653	2033
Diameter (mm)	542	542	750/807	1017
Net Weight (kg)	75	85	100	190
Volume (lt)	170	245	454	970
Insulation	50 mm /40 kg/m ³	50 mm /40 kg/m ³	50 mm /40 kg/m ³ 80 mm /18 kg/m ³	80 mm /18 kg/m ³
Insulating Material	Polyurethane (CFC Free)	Polyurethane (CFC Free)	Polyurethane / 18 Density Foam Rubber (CFC Free)	18 Density Foam Rubber
Outer Cylinder Materials	Electrostatic Powder Painted ST 37 Steel	Electrostatic Powder Painted ST 37 Steel	Electrostatic Powder Painted ST 37 Steel / Leatherette Jacket	Leatherette Jacket
Materials of Coil	AISI 316 L Stainless Steel	AISI 316 L Stainless Steel	AISI 316 L Stainless Steel	AISI 316 L Stainless Steel
Number of Coils	1	1	1	1
1. Coil Area (m ²)	3,83	3,83	5,48	8,76